

## NGd-不锈钢网

防爆挠性连接管

Explosion-proof flexible connecting pipe


## JSH-系列波浪型防水电线保护软管

金属软管

metallic flexible hose



<b>材质</b> Material	不锈钢网 stainless steel net		
<b>特点</b> Features	适用于防爆电气设备进出线连接或钢管布线弯曲难度比较大的场所 Used in explosion-proof electrical equipment import connection or steel pipe bending more difficult places		
	比较适用于穿导线或比较细的电缆 Suitable for cable to wear a wire or fine		
<b>防爆标志</b> Ex mark	ExdII C Gb/Gb DIPA20	<b>防护等级</b> Degree of protection	IP66
<b>工作温度</b> COT	-60°C ~100°C		

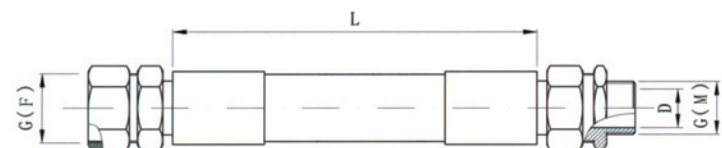


订购示例 (eg): NGd-20 × 700G3/4(F)/G3/4(M) II (两端接头可按客户要求定制)

单位:mm

规格型号 size	公称口径 nominal diameter	G (M)	G (F)	最小弯曲半径 minimum bending radius	长度 length	适用外径 Suitable diameter
NGd-15 × 700(1000)	15	G1/2	G1/2	80	700(或1000)	≤ Φ8
NGd-20 × 700(1000)	20	G3/4	G3/4	110	700(或1000)	≤ Φ10
NGd-25 × 700(1000)	25	G1	G1	145	700(或1000)	≤ Φ16
NGd-32 × 700(1000)	32	G1-1/4	G1-1/4	180	700(或1000)	≤ Φ18
NGd-40 × 700(1000)	40	G1-1/2	G1-1/2	210	700(或1000)	≤ Φ21
NGd-50 × 700(1000)	50	G2	G2	250	700(或1000)	≤ Φ34
NGd-70 × 700(1000)	70	G2-1/2	G2-1/2	350	700(或1000)	≤ Φ54
NGd-80 × 700(1000)	80	G3	G3	400	700(或1000)	≤ Φ58
NGd-100 × 700(1000)	100	G4	G4	500	700(或1000)	≤ Φ75



<b>材质</b> Material	镀锌铁皮制成, 表面低烟毒塑料被覆 Galvanized sheet is made, low smoke and toxic plastic coated surface		
<b>特点</b> Features	轻质结构, 绝佳弯曲性能及低烟毒耐燃特征 The light structure, excellent bending performance and low smoke poison resistant characteristics		
	适用于任何狭小空间或通风不良注重安全等电气配管区域 Used in any narrow space or poor ventilation focus on safety and other electrical piping area		
<b>工作温度</b> COT	-10°C ~80°C		

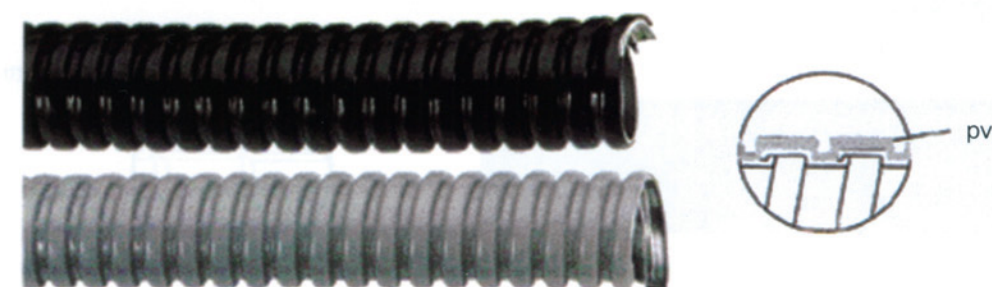

订购示例 (eg): JSH-20

单位:mm

型号 type	规格 Trade size	内径 inside diameter(mm)	外径 outside diameter(mm)	包装长度 coil(m)
JSH-6	3/16"	6-6.3	8.8-9.1	100
JSH-8	1/4"	8.2-8.5	11.7-12.0	100
JSH-10	5/16"	9.9-10.2	13.7-14.0	50
JSH-12	3/8"	12.-12.6	16.5-16.8	50
JSH-16	1/2"	15.5-15.8	20.3-20.6	50
JSH-20	3/4"	20.4-20.7	25.3-25.6	50
JSH-25	1"	25.5-26.0	30.8-31.2	50
JSH-32	1-1/4"	32.7-33.2	39.2-39.5	25
JSH-38	1-1/2"	38.5-39.0	46.2-46.5	25
JSH-51	2"	50.5-51.0	59.7-60.0	20
JSH-64	2-1/2"	62.3-63.0	72.6-73.3	10
JSH-75	3"	74.4-74.9	86.6-87.3	10
JSH-100	4"	97.5-98.5	109.5-110.5	10