



JS-系列可挠性金属电线保护软管

阻燃尼龙波纹管

金属软管 metallic flexible hose Flame retardant Polyamide Flexible Pipe

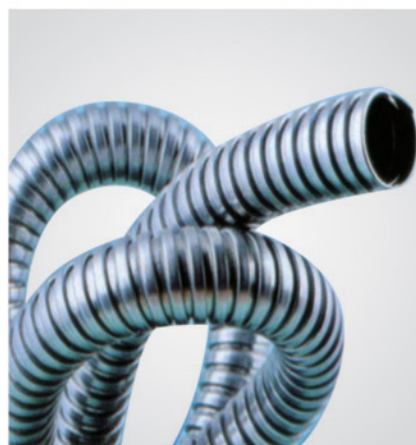

材质 Material	镀锌铁皮制成，不防水型 wire-braided
特点 Features	轻质方型扣合结构 Light type buckling structure
	弯曲半径小，柔软性佳 Small bending radius, good softness

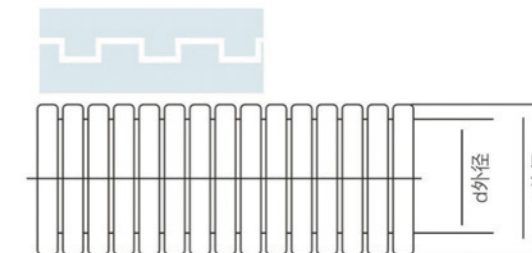

产品材质: PA6尼龙 (Polyamide), 阻燃等级FV-O
工作温度: -40℃至125℃, 短时可达140℃
产品结构: 内部和外表为波浪型。
产品特性: 柔韧性好、抗扭曲、弯曲性能好, 可以承受较重的负载; 耐酸、润滑油、冷却剂等; 表面有光泽、耐摩擦。
承载能力: 可以承载脚踩的重压, 不断裂、不变形, 可以迅速恢复, 并且本身无任何损伤。
颜色种类: 黑色。其它颜色可定做 (根据需要可开口)。
应用领域: 机械制造、电气绝缘保护、照明设备、汽车制造、航空设备、地铁、火车、自动化控制等行业。
使用方法: 将电线电缆插入管内, 再配上软管接头对应的型号使用即可。

Material: Nylon PA6
Working temperature: -40°C to 125°C, 140°C can be reached but kept only for a short time
Style: Close and split
Colour: Black, other color available upon request
Property: Good flexibility, twist resistance and good bending performance, able to bear heavy loads; acid resistant, lubricant resistant and coolant resistant; luster on surface and abrasion resistant
Load bearing capacity: able to bear the heavy pressure from treading of feet without cracking or deformation. It can promptly recoil with no damages
Application: Machinery building, electrical insulation equipment, automobile manufacturing, flight equipments, metro, trains and automatic control, etc

订购示例 (eg): JS-20

单位:mm

型号 type	规格 Trade size	内径 inside diameter(mm)	外径 outside diameter(mm)	包装长度 coil(m)
JS-6	3/16"	6.0-6.3	8.2-8.5	100
JS-8	1/4"	8.2-8.5	10.9-11.2	100
JS-10	5/16"	9.9-10.2	13.0-13.3	50
JS-12	3/8"	12.-12.6	15.4-15.7	50
JS-16	1/2"	15.5-15.8	19.4-19.7	50
JS-20	3/4"	20.4-20.7	24.4-24.7	50
JS-25	1"	25.5-26.0	29.6-30.1	50
JS-32	1-1/4"	32.7-33.2	37.7-38.2	25
JS-38	1-1/2"	38.5-39.0	44.7-45.2	25
JS-51	2"	50.5-51.0	58.2-58.7	20
JS-64	2-1/2"	62.3-63.0	70.3-71.0	10
JS-75	3"	74.4-74.9	83.3-83.8	10

单位:mm

软管规格 (AD) Specification	编号 item.No.	内径x外 (mm) Inner Diameter X Outer Diameter	弯曲半径 (mm) Curved radius	包装 Std.Pkg.pcs
AD10.0	FFP-PA-10.0	6.5X10.0	16	100
AD11.6	FFP-PA-11.6	8.0X11.6	16	100
AD13.0	FFP-PA-13.0	10.0X13.0	20	100
AD15.8	FFP-PA-15.8	12.0X15.8	30	100
AD18.5	FFP-PA-18.5	14.3X18.5	40	100
AD21.2	FFP-PA-21.2	17.0X21.2	45	100
AD25.0	FFP-PA-25.0	20.0X25.0	45	50
AD28.5	FFP-PA-28.5	23.0X28.5	50	50
AD34.5	FFP-PA-34.5	29.0X34.5	60	50
AD42.5	FFP-PA-42.5	36.0X42.5	70	50
AD54.5	FFP-PA-54.5	48.0X54.5	90	25